



# Cuisine Series Heavy Duty Even Heat Hot Top Range

Item: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_  
Approval: \_\_\_\_\_  
Date: \_\_\_\_\_

Models:

☐ C836-8

☐ C0836-8

☐ C0836-8M

Range with Three 12"  
Even Heat Hot Tops



*Model C386-8*

Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall

## Standard Features:

- 12" (305mm) Hot Top section 25,000 BTUs
- Full-range burner valve control
- Stainless steel front and sides
- Stainless steel front rail w/position adjustment bar
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- Automatic lighting - all burners
- 6" (152mm) H stainless steel stub back
- 6" (152mm) chrome steel adj. legs
- One year limited parts and labor warranty
- 40,000 BTU oven burner
- Chrome plated rack with four positions, 1 per oven
- Fully insulated oven interior
- 100% safety oven pilot
- Oven thermostat control - 150°-500°F (66°-260°C)

## Optional Features:

- ☐ Stainless steel back
- ☐ Range base convection oven (add RC)

- ☐ Porcelain oven interior in lieu of stainless steel interior - NC
- ☐ Single or double deck high shelf or back riser
- ☐ Modular unit w/ legs & shelf (suffix M)
- ☐ Modular unit w/o legs on Refrig. Base (change suffix M to PC)
- ☐ Stainless steel intermediate shelf for cabinet base
- ☐ Stainless steel door(s) for cabinet base units
- ☐ Continuous plate shelf, 48-72" for battery installations
- ☐ Gas shut-off valves - 3/4", 1", 1 1/4" NPT (Specify)
- ☐ Gas regulator: 3/4"- 1 1/4" NPT (Specify)
- ☐ Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- ☐ Stainless steel legs (set of four)
- ☐ Flanged feet set of four
- ☐ Swivel casters (4) w/ front locking
- ☐ Casters w/ polyurethane wheels - non marking
- ☐ Extra oven rack
- ☐ Rear Gas Connection: 3/4" NPT (max 250,000 BTU's) or 1-1/4" NPT

## Specifications:

U.S. Range Cuisine Series 36" (914mm) wide Heavy Duty Range Series. Model \_\_\_\_\_ with total BTU/hr rating of \_\_\_\_\_ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

**Ovens** - One piece oven door. Stainless steel oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C). One chrome plated oven rack for standard ovens and three for convection ovens.

**12" (305mm) Section Hot Tops** - 25,000 BTU/hr each burner with one per plate.



NOTE: Ranges supplied with casters must be installed with an approved restraining device.

Garland Commercial  
Industries, LLC  
185 East South Street  
Freeland, PA 18224  
Phone: (570) 636-1000  
Fax: (570) 636-3903

Garland Commercial Ranges Ltd  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA  
Phone: 905-624-0260  
Fax: 905-624-5669

Enodis UK LTD  
Swallowfield Way,  
Hayes, Middlesex  
UB3 1DQ ENGLAND  
Telephone: 081-561-0433  
Fax: 081-848-0041

Enodis

Cuisine Series Heavy Duty Even Heat Hot Top Range






Model #	Description	Total BTU (NAT. Gas)
C836-8*	Three (3) - 12" (305mm) Hot Tops - Standard Oven	115,000
C0836-8	Three (3) - 12" (305mm) Hot Tops - Cabinet	75,000
C0836-8	Three (3) - 12" (305mm) Hot Tops - Modular	75,000

\* Add Suffix "RC" For Convection Oven Base

Individual Burner Ratings (BTU/hr)		
Burner	NAT.	PRO.
12" Hot Top	25,000	
Std. Oven	40,000	35,000
Conv. Oven	37,000	35,000

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2(323)	26-1/4 (667)	29 (737)
Convection	13-1/2(323)	26-1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)

Gas Pressure	NAT.	PRO.
Min. Supply	7" WC	11" WC
Operating	6" WC	10" WC
Gas Manifold 1-1/4" NPT		

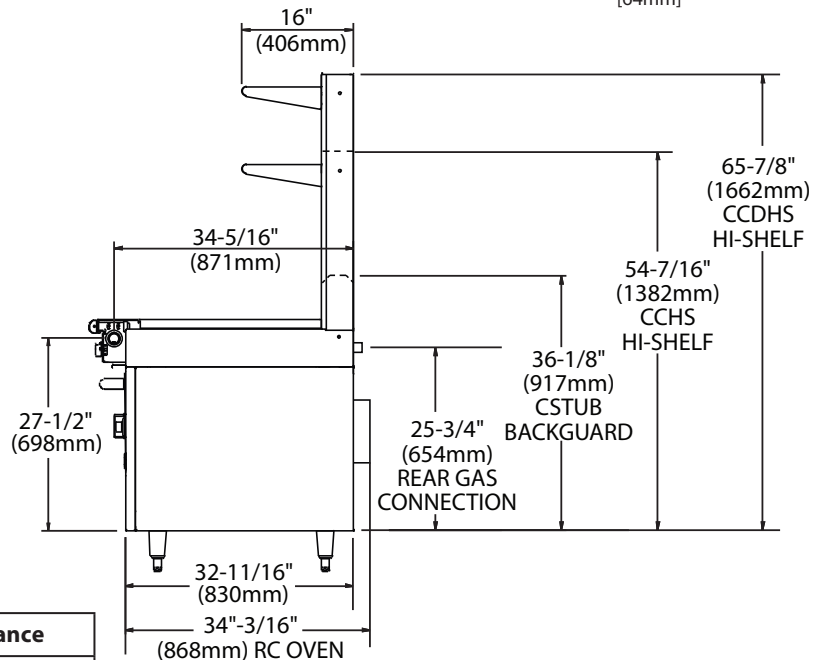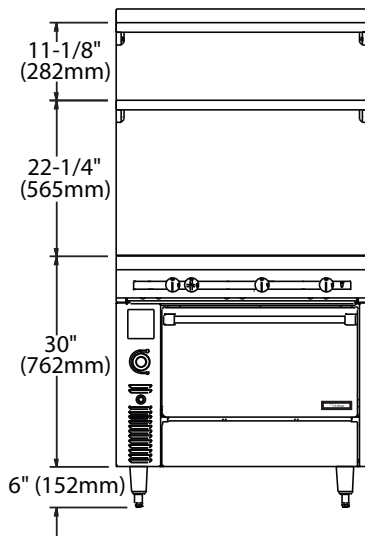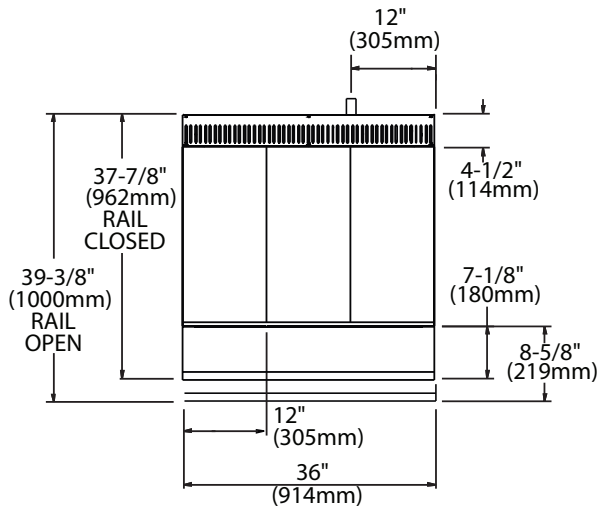

Combustible Wall Clearance	
Sides	Back
6" (152mm)	6" (152mm)

Form# C836-8 (08/07)